


AluCover

AluCover is a sub-floor specially designed for installation on all types of floor heating systems. AluCover provides a very stable subfloor that provides high resistance to both static and dynamic loads. All types of flooring can be laid on top of AluCover. It is particularly suitable for full-lined carpets, linoleum, vinyl and cork.

The very low heat resistance will lead heat from the floor heating system without problems. This gives a positive effect on the heat efficiency.

AluCover is made of high quality MDF plate and consists of a bottom plate (3 mm) and a top plate (4 mm). Both plates are provided with a special, interactive glue that binds them thoroughly after installation, after which you have a very stable sub-floor.

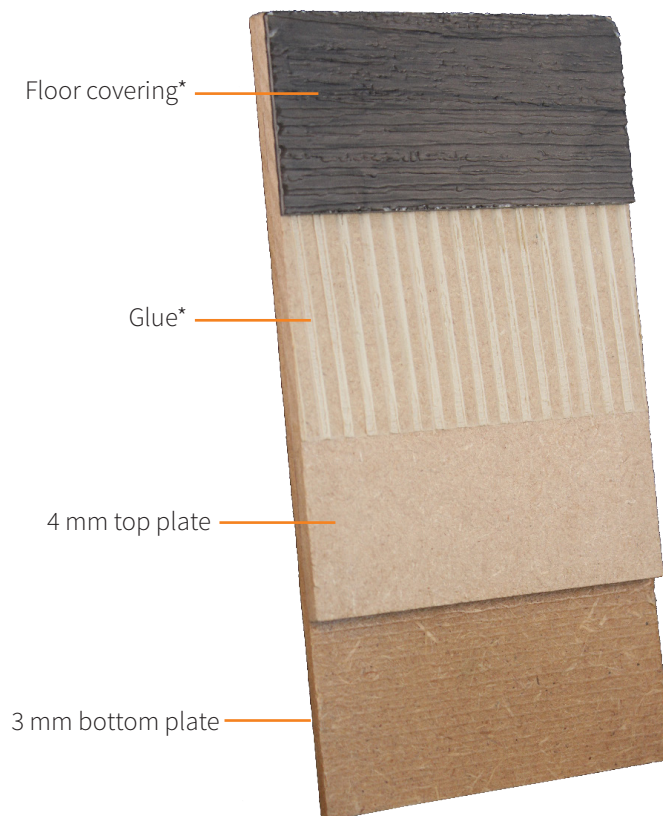

* Not included

Technical Data



Height/Tolerance	7+/-0,2
Dimensions / Tolerance	600 x 1200 / +/-1,5
1 package	4 bottom (3 mm) / 4 top (4 mm) 2,88 m ²
Raw material	MDF with stickiness
Weight	770 kg/m ³
Bending strength	>40 kg/cm ²
Fire protection class DIN 4102	B2
Moisture	4-10 %
Max. water absorption after 24 hours	<40 %
Conduction degree (m ² .KW.- ¹)	0,047
Formaldehyde degree	E - 1
Warranty	10 years

AluCover

Item	Type	Description	Height	Width	Length
40180700	AC7	AluCover 2,88 m ² per package	7 mm	600 mm	1200 mm