


MIRROR HEATING flxheat

Technical data

Voltage	230 V ~ 50 Hz
Thickness	1 mm (when connected 8 mm)
Insulation inner sheath	NA
Authorisation	CE, BEAB
Heat conductor	Heating foil
Insulation	II, Double insulated
Outer sheath	PVC
Max. temp. on cable	70° C
Warranty	3 years
Resistance tolerance	- 5 % / + 10 %

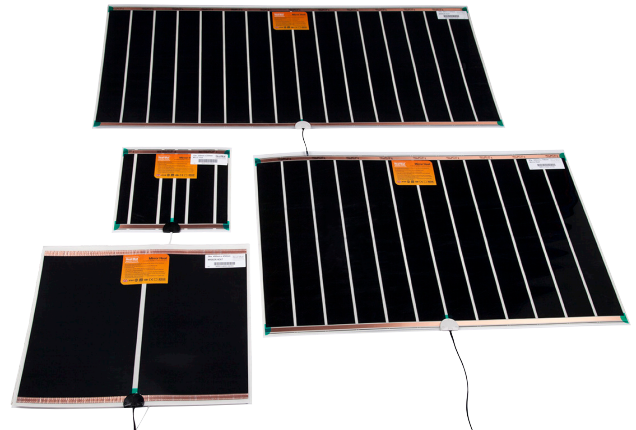

Item	Type	Description	Power	Current	Mains cable
40302525	HD-0250-0250	Mirror Heating 15 W 265x274 mm	15 W	0.1 A	1 m
40302555	HD-0250-0550	Mirror Heating 25 W 274x584 mm	25 W	0.1 A	1 m
40304040	HD-0400-0450	Mirror Heating 36 W 400x450 mm	36 W	0.2 A	1 m
40305050	HD-0500-0500	Mirror Heating 50 W 520x524 mm	50 W	0.2 A	1 m
40307657	HD-0760-0500	Mirror Heating 80 W 524x785 mm	80 W	0.3 A	1 m
40311060	HD-1016-0500	Mirror Heating 100 W 524x1040mm	100 W	0.4 A	1 m

Description

Mirror heating keeps the mirror free from dew.

With the adhesive backing, it is easy to mount the mirror heating behind the mirror in the bathroom. No dew on the mirror after the bath - less cleaning of the mirror.

Mirror heating can eg. be switched on with the light in the bathroom, or connected with a switch and turned on/off separately.