


E-Heat Water

Self-regulating heating cable 11 W

A self-regulating heating cable with a ground shield screen of aluminium foil, which makes it very easy for the electrician to terminate it in relation to the tin-plated copper braid. The cable is mostly used for outdoor frost protection for water pipes.

The cable's nominal dimension is 8.0 x 5.0 mm and the outer sheath has a new type of coating – Adex – which has been approved for indoor use for drinking water. Adex is less expensive to manufacture than fluropolymer. Therefore, the cable's characteristics include: optimal use, inexpensive to get due to Adex and the aluminium foil screen – but also faster to terminate.

The maximum temperature for the cable is 65 °C/65 °C and the minimum installation temperature is -30 °C.

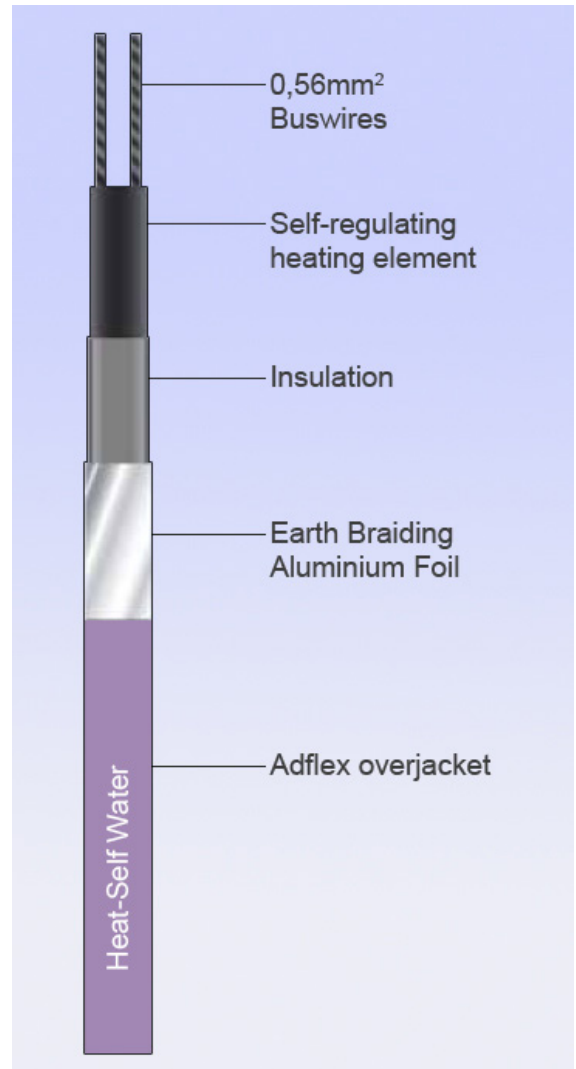

Technical Data



Voltage	230 V
Min. bend radius	35 mm
Max. temp	65 °C
Min. temp	-30 °C
Nom. dimension	8.0 x 5.0 mm
Approvals	CE
Warranty	3 years
Length tolerance	+/- 2 %

E-Heat Water 11 W

Item	Type	Description	Effect/10°C	Power	Max length m/+10 °C	Max length m/0 °C	Max length m/-20 °C
40040040	SeW11	Heat-Self Water 11 W@+5C purple	11 W	10 A	52	48	40
			11 W	16 A	60	54	47